SOD1E1 THRU SOD1E8

SURFACE MOUNT SUPER FAST RECTIFIER

Reverse Voltage - 50 to 600 Volts Forward Current - 1.0 Ampere

SOD-123FL

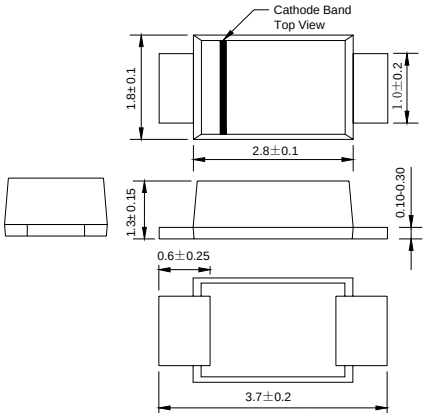

Dimensions in millimeters

FEATURES

- Glass passivated device
- Ideal for surface mouted applications
- Low reverse leakage
- Metallurgically bonded construction
- High temperature soldering guaranteed:
  250℃/10 seconds,0.375"(9.5mm) lead length,
  5 lbs. (2.3kg) tension

MECHANICAL DATA

Case: JEDEC SOD-123FL molded plastic body over passivated chip
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any
Weight:0.0007 ounce, 0.02 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 ℃ ambient temperature unless otherwise specified.
Single phase half-wave 60Hz,resistive or inductive load,for capacitive load current derate by 20%.

TWGMC Catalog Number	SYMBOLS	SOD1E1 E1	SOD1E2 E2	SOD1E3 E3	SOD1E4 E4	SOD1E5 E5	SOD1E6 E6	SO1E8 E8	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	150	200	300	400	600	VOLTS
Maximum RMS voltage	V_{RMS}	35	70	105	140	210	280	420	VOLTS
Maximum DC blocking voltage	V_{DC}	50	100	150	200	300	400	600	VOLTS
Maximum average forward rectified current	$I_{(AV)}$	1.0							Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	25.0							Amps
Maximum instantaneous forward voltage at1.0A	V_F	0.95				1.25		1.7	Volts
Maximum DC reverse current T_A=25℃ at rated DC blocking voltage T_A=100℃	I_R	5.0 100.0							μA
Maximum reverse recovery time (NOTE 1)	trr	35							ns
Typical junction capacitance (NOTE 2)	C_J	10							pF
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$	85							K/W
Operating junction and storage temperature range	T_J,T_{STG}	-55 to +150							℃

Note: 1.Measured with IF=0.5A, IR=1A, Irr=0.25A.
2.Measured at 1MHz and applied reverse voltage of 4.0V D.C.
3.PCB mounted on 0.2*0.2" (5.0*5.0mm) coppeer pad area.

RATINGS AND CHARACTERISTIC CURVES SOD1E1 THRU SOD1E8

FIG. 1- FORWARD CURRENT DERATING CURVE

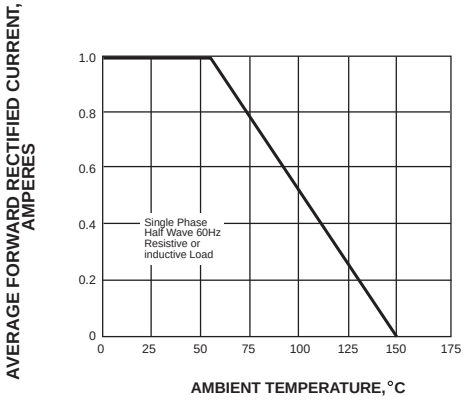

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

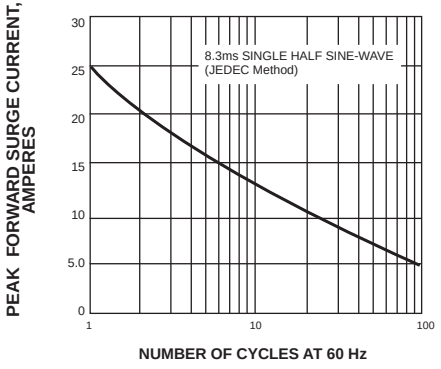

FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

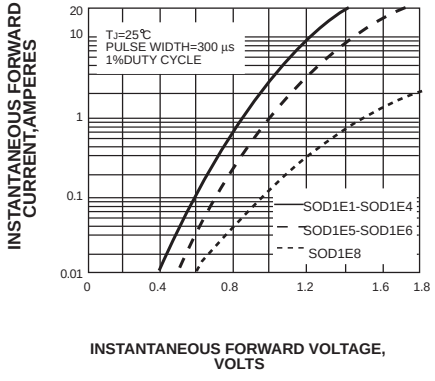

FIG. 4-TYPICAL REVERSE CHARACTERISTICS

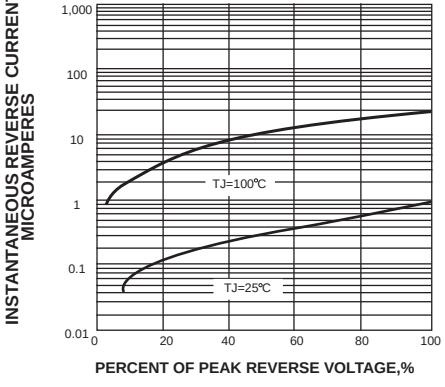

FIG. 5-TYPICAL JUNCTION CAPACITANCE

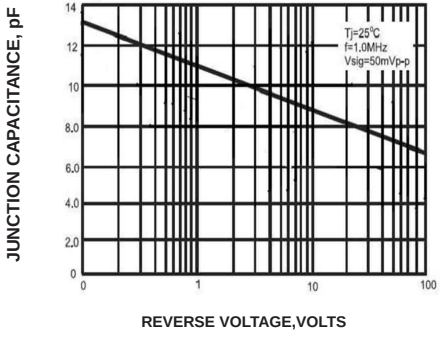
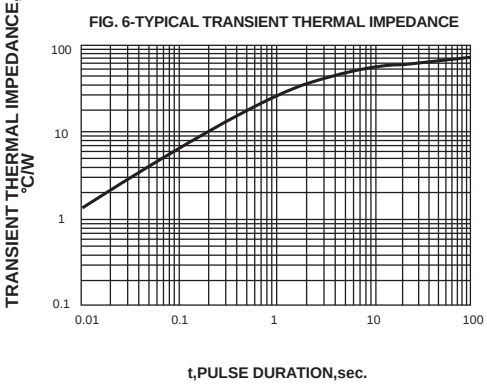
FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE