




# KBPC35005W THRU KBPC3510W

## SILICON BRIDGE RECTIFIERS

Reverse Voltage - 50 to 1000 Volts Forward Current - 35.0 Amperes

### KBPC-35W

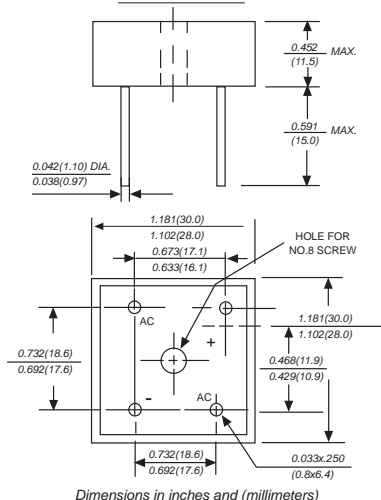

### FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Ideal for printed circuit boards
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 260°C/10 seconds, at 5 lbs. (2.3kg) tension

### MECHANICAL DATA

**Case:** Metal case  
**Terminals:** Lead 0.040" (1.02mm) diameter.  
**Polarity:** Polarity symbols marked on case  
**Mounting:** Thru hole for #8 screw, 20in.-lbs. torque max.  
**Weight:** 0.93 ounce, 26.4 grams

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.  
 Single phase half-wave 60Hz, resistive or inductive load, for current capacitive load current derate by 20%.

| TWGMC Catalog Number  | SYMBOLS         | KBPC 35005W | KBPC 3501W | KBPC 3502W | KBPC 3504W | KBPC 3506W | KBPC 3508W | KBPC 3510W | UNITS                     |
|---|-----------------|-------------|------------|------------|------------|------------|------------|------------|---------------------------|
| Maximum repetitive peak reverse voltage   | $V_{RRM}$       | 50          | 100        | 200        | 400        | 600        | 800        | 1000       | VOLTS                     |
| Maximum RMS voltage   | $V_{RMS}$       | 35          | 70         | 140        | 280        | 420        | 560        | 700        | VOLTS                     |
| Maximum DC blocking voltage   | $V_{DC}$        | 50          | 100        | 200        | 400        | 600        | 800        | 1000       | VOLTS                     |
| Maximum average forward output rectified current at $T_C=50^\circ\text{C}$ (Note 1,2)                           | $I_{(AV)}$      | 35          |            |            |            |            |            |            | Amps                      |
| Peak forward surge current<br>8.3ms single half sine-wave superimposed on rated load (JEDEC Method)             | $I_{FSM}$       | 400.0       |            |            |            |            |            |            | Amps                      |
| Rating for Fusing ( $t < 8.3\text{ms}$ )  | $I^2t$          | 664         |            |            |            |            |            |            | $\text{A}^2\text{s}$      |
| Maximum instantaneous forward voltage drop per bridge element at 17.5A  | $V_F$           | 1.1         |            |            |            |            |            |            | Volts                     |
| Maximum DC reverse current<br>at rated DC blocking voltage<br>$T_A=25^\circ\text{C}$<br>$T_A=100^\circ\text{C}$ | $I_R$           | 10          |            |            |            |            |            |            | $\mu\text{A}$             |
|   |                 | 1.0         |            |            |            |            |            |            | $\text{mA}$               |
| Isolation voltage from case to leads  | $V_{ISO}$       | 2500        |            |            |            |            |            |            | $V_{AC}$                  |
| Typical Thermal Resistance (Note 2)   | $R_{\theta JA}$ | 2.0         |            |            |            |            |            |            | $^\circ\text{C}/\text{W}$ |
| Operating junction temperature range  | $T_J$           | -65 to +150 |            |            |            |            |            |            | $^\circ\text{C}$          |
| storage temperature range   | $T_{STG}$       | -65 to +150 |            |            |            |            |            |            | $^\circ\text{C}$          |


#### NOTES:

1. Unit mounted on 9" x 3.5" x 4.6" thick (23cm x 9cm x 11.8cm) Al. plate.
2. Bolt down on heat-sink with silicone thermal compound between bridge and mounting surface for maximum heat transfer efficiency with #8 screw.

# RATINGS AND CHARACTERISTIC CURVES KBPC35005W THRU KBPC3510W


AVERAGE FORWARD RECTIFIED CURRENT,  
AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

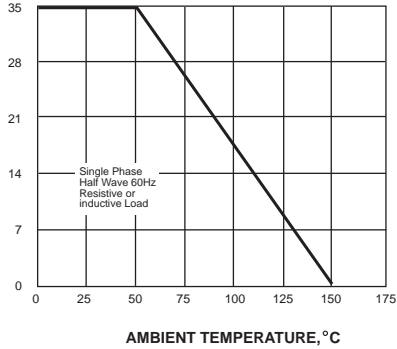


PEAK FORWARD SURGE CURRENT,  
AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

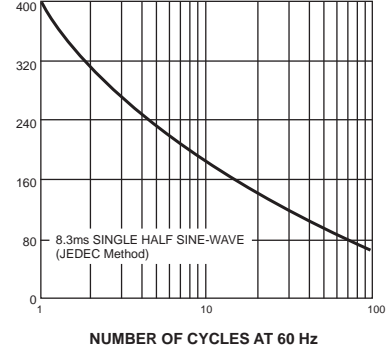

INSTANTANEOUS FORWARD  
CURRENT, AMPERES


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

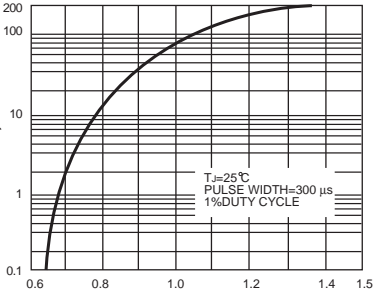

INSTANTANEOUS FORWARD VOLTAGE,  
VOLTS

INSTANTANEOUS REVERSE CURRENT,  
MICROAMPERES


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

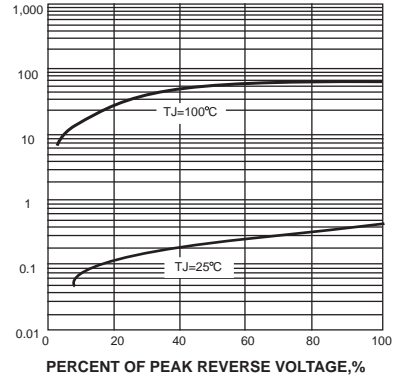

PERCENT OF PEAK REVERSE VOLTAGE, %

JUNCTION CAPACITANCE, pF


FIG. 5-TYPICAL JUNCTION CAPACITANCE

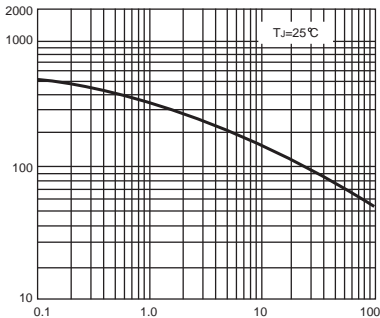

REVERSE VOLTAGE, VOLTS

TRANSIENT THERMAL IMPEDANCE,  
°C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

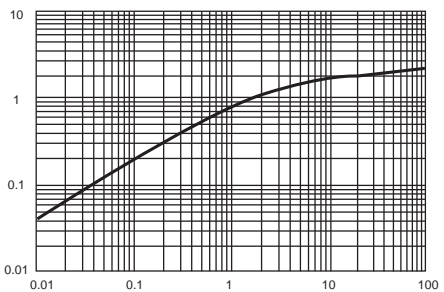

t, PULSE DURATION, sec.